


AFF756

MagnetoResistive Field Sensor



The AFF756 is a low noise magnetic field sensor based on the Anisotropic-MagnetoResistive (AMR) effect.

The sensor contains a Wheatstone bridge including a flip coil for offset correction. This measurement principle also reduces the temperature coefficient of the offset by a factor of 100.

The AFF756 is available as an LGA package (RoHS-conform) for SMD assembly.

Product Overview

Article description	Package	Delivery Type
AFF756AMA-AE	LGA8	Tape on reel

Quick Reference Guide

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_{CC}	Supply voltage	1.2	5.0	9.0	V
R_B	Bridge resistance ¹⁾	0.7	1.0	1.3	k Ω
S	Sensitivity (in range ± 160 A/m)	8.0	10.0	12.0	$\frac{mV}{V}$ kA/m
I_F	Flip current (required)	± 400	-	-	mA
R_F	Flip coil resistance	-	1.5	2.0	Ω

¹⁾ Bridge resistance between pins 6 and 3; 5 and 2.

Absolute Maximum Ratings

In accordance with the absolute maximum rating system (IEC60134).

Symbol	Parameter	Min.	Max.	Unit
V_{CC}	Supply voltage	-20	+20	V
I_{Fmax}	Maximum flip current ²⁾	-1.0	+1.0	A
P_F	Maximum flip power dissipation	-	50	mW
T_{amb}	Ambient temperature	-40	+125	$^{\circ}C$
T_{stg}	Storage temperature	-40	+125	$^{\circ}C$
$V_{isolation}$	Voltage between bridge and flip coil	-200	+200	V

²⁾ 10 μ s pulse, 400 μ s pause.

Stresses beyond those listed under "Absolute maximum ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Features

- Based on the AnisotropicMagnetoResistive (AMR) effect
- Contains one Wheatstone Bridge
- Integrated flip coil
- Temperature range from -40 $^{\circ}C$ to $+125$ $^{\circ}C$

Advantages

- Extreme sensitivity
- Wide range of magnetic field strength
- Low power consumption
- Low flip coil resistance
- Very good signal to noise ratio

Applications

- Compass
- Electronic navigation systems
- Battery powered applications
- Magnetometry
- Measurement of terrestrial magnetic field
- Traffic detection



ESD

Magnetic Data

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
H_{ext}	Operating magnetic field range		-800	-	+800	A/m
B_{RES}	Resolution	$V_{CC} = 5\text{ V}; BW = 50\text{ Hz}$	-	2.0	-	nT

Electrical Data of MR-Bridge

$T_{amb} = 25\text{ °C}; V_{CC} = 5\text{ V};$ unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{CC}	Supply voltage		1.2	5.0	9.0	V
S	Sensitivity	In the operating range of $\pm 160\text{ A/m}$	8.0	10.0	12.0	$\frac{\text{mV/V}}{\text{kA/m}}$
TC_S	Temperature coefficient of Sensitivity ¹⁾	See Fig. 5	-0.32	-0.36	-0.40	%/K
R_B	Bridge resistance ²⁾		0.7	1.0	1.3	k Ω
TC_{RB}	Temperature coefficient of R_B ³⁾		0.22	0.26	0.30	%/K
V_{off}	Offset voltage per V_{CC}		-1.0	-	+1.0	mV/V
TC_{Voff}	Temperature coefficient of V_{off} ⁴⁾		-1.0	-	+1.0	$\mu\text{V/V/K}$
H_{off}	Magnetic offset per V_{CC}		-	0.15	-	A/m/V
N	Noise level	$f > 100\text{ Hz}$	-	10.0	20.0	nV/ $\sqrt{\text{Hz}}$
$\epsilon_{Lin,80}$	Linearity error @ $\pm 160\text{ A/m}$	$-160 \leq H_{ext} \leq +160\text{ A/m}$	-	0.15	0.25	% of FS
$\epsilon_{Lin,240}$	Linearity error @ $\pm 480\text{ A/m}$	$-480 \leq H_{ext} \leq +480\text{ A/m}$	-	0.80	0.90	% of FS
$\epsilon_{Lin,400}$	Linearity error @ $\pm 800\text{ A/m}$	$-800 \leq H_{ext} \leq +800\text{ A/m}$	-	2.30	2.70	% of FS

$$1) TC_S = 100 \cdot \frac{S_{(T_2)} - S_{(T_1)}}{S_{(T_1)} \cdot (T_2 - T_1)} \text{ with } T_1 = 25\text{ °C}; T_2 = 125\text{ °C}.$$

2) Bridge resistance between pins 2 and 5, 3 and 6.

$$3) TC_{RB} = 100 \cdot \frac{R_{B(T_2)} - R_{B(T_1)}}{R_{B(T_1)} \cdot (T_2 - T_1)} \text{ with } T_1 = 25\text{ °C}; T_2 = 125\text{ °C}.$$

$$4) TC_{Voff} = \frac{V_{off(T_2)} - V_{off(T_1)}}{T_2 - T_1} \text{ with } T_1 = 25\text{ °C}; T_2 = 125\text{ °C}.$$

Electrical Data of Flip Coil and Test Connectors

$T_{amb} = 25\text{ °C}; V_{CC} = 5\text{ V};$ unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_F	Flip current (required)	1 μs on, 1 ms off	± 400	-	-	mA
t_{IF}	Flip pulse duration		-	1.0	2.0	μs
I_{Fmax}	Flip current (maximum)	10 μs on, 400 μs off	-	-	± 1.0	A
R_F	Flip coil resistance		-	1.5	2.0	Ω
TC_{RF}	Temperature coefficient of R_F ⁵⁾		0.30	0.35	0.40	%/K

$$5) TC_{RF} = 100 \cdot \frac{R_{F(T_2)} - R_{F(T_1)}}{R_{F(T_1)} \cdot (T_2 - T_1)} \text{ with } T_1 = 25\text{ °C}; T_2 = 125\text{ °C}.$$

Dynamic Data

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
f	Frequency range		1	-	-	MHz

AFF756 in LGA-Housing

Pinning

Pin	Symbol	Parameter
1	+I _F	Flip coil
2	-V _o	Negative output voltage
3	GND	Ground
4	N.C	Not connected
5	+V _o	Positive output voltage
6	V _{CC}	Supply voltage
7	-I _F	Flip coil
8	N.C	Not connected

Pin 1 is marked by a point on housing.

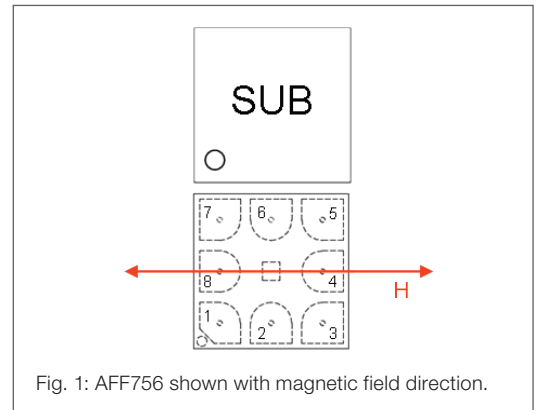


Fig. 1: AFF756 shown with magnetic field direction.

Marking

1st letter	Type of sensor	2nd letter	Calendar week	3rd letter	Year
S	AFF756	A	1 / 2	A	2009
		B	3 / 4	B	2010
	

Dimensions

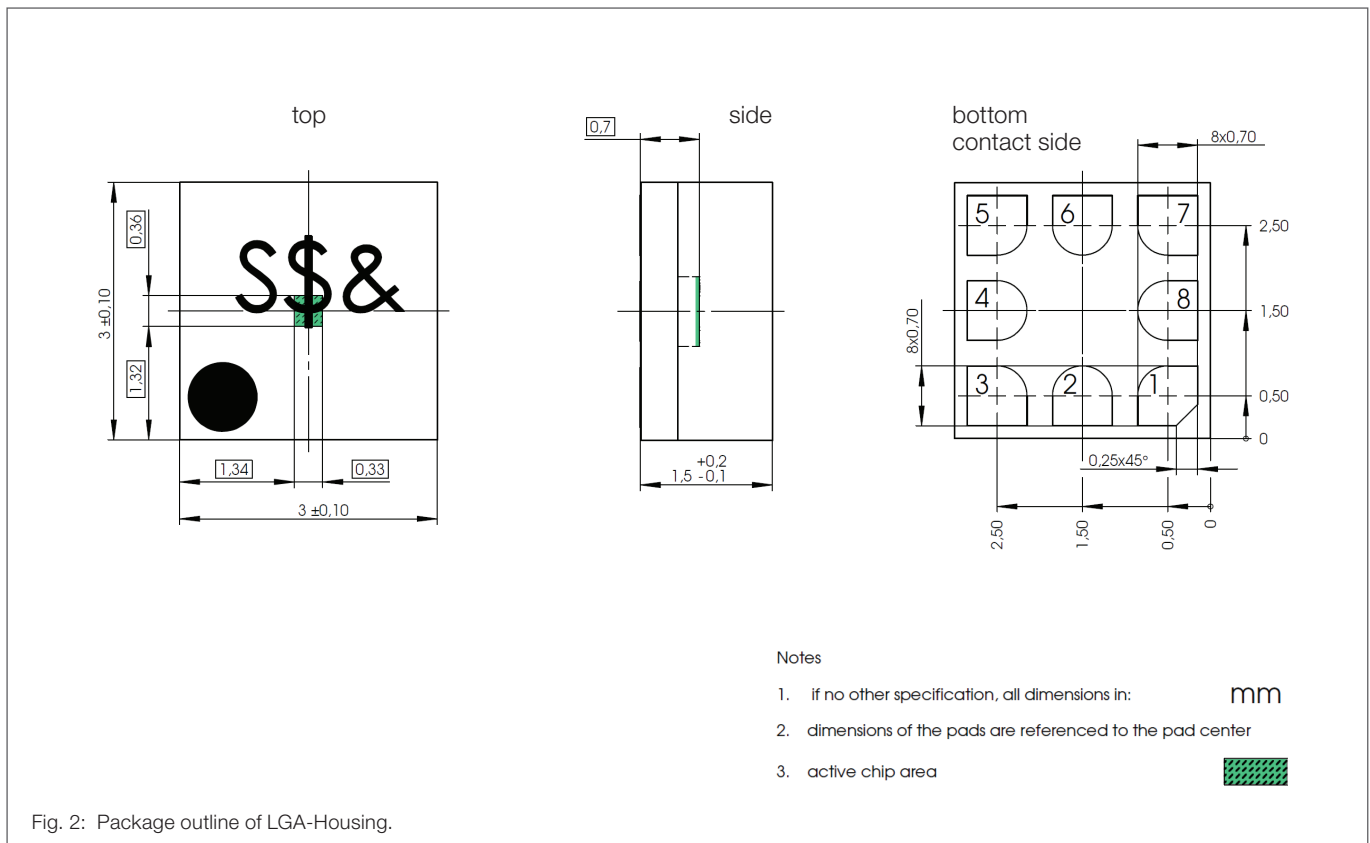


Fig. 2: Package outline of LGA-Housing.

General Information

Product Status

Article	Status
AFF756AMA-AE	The product is in series production.
Note	The status of the product may have changed since this data sheet was published. The latest information is available on the internet at www.sensitec.com .

Disclaimer

Sensitec GmbH reserves the right to make changes, without notice, in the products, including software, described or contained herein in order to improve design and/or performance. Information in this document is believed to be accurate and reliable. However, Sensitec GmbH does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Sensitec GmbH takes no responsibility for the content in this document if provided by an information source outside of Sensitec products.

In no event shall Sensitec GmbH be liable for any indirect, incidental, punitive, special or consequential damages (including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) irrespective the legal base the claims are based on, including but not limited to tort (including negligence), warranty, breach of contract, equity or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Sensitec product aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the General Terms and Conditions of Sale of Sensitec GmbH. Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Unless otherwise agreed upon in an individual agreement Sensitec products sold are subject to the General Terms and Conditions of Sales as published at www.sensitec.com.

Sensitec GmbH

Georg-Ohm-Str. 11 · 35633 Lahnau · Germany
Tel. +49 6441 9788-0 · Fax +49 6441 9788-17
www.sensitec.com · sensitec@sensitec.com

General Information

Application Information

Applications that are described herein for any of these products are for illustrative purposes only. Sensitec GmbH makes no representation or warranty – whether expressed or implied – that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Sensitec products, and Sensitec GmbH accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Sensitec product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Sensitec GmbH does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Sensitec products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s).

Sensitec does not accept any liability in this respect.

Life Critical Applications

These products are not qualified for use in life support appliances, aeronautical applications or devices or systems where malfunction of these products can reasonably be expected to result in personal injury.

Copyright © 2019 by Sensitec GmbH, Germany

All rights reserved. No part of this document may be copied or reproduced in any form or by any means without the prior written agreement of the copyright owner. The information in this document is subject to change without notice. Please observe that typical values cannot be guaranteed. Sensitec GmbH does not assume any liability for any consequence of its use.

Sensitec GmbH

Georg-Ohm-Str. 11 · 35633 Lahnau · Germany
Tel. +49 6441 9788-0 · Fax +49 6441 9788-17
www.sensitec.com · sensitec@sensitec.com