


Current Sensor

Product Series: STK-CTS/P

Part number: STK-20CTS/P1、STK-25CTS/P1、
STK-32CTS/P1、STK-25CTS/P2、
STK-25CTS/P3、STK-25CTS/P4

Version: Ver5.3

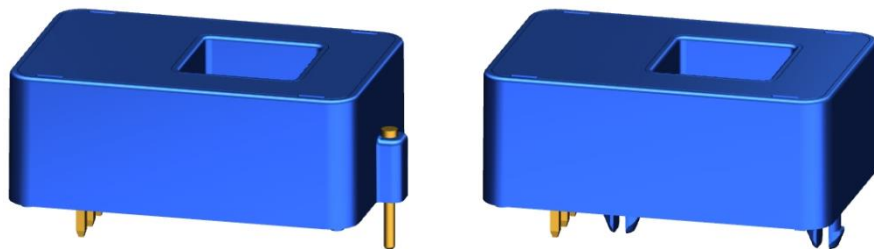

Sinomags Technology Co., Ltd

Web site : www.sinomags.com

CONTENT

1. Description	2
2. Electrical data STK-20CTS/P1.....	3
3. Electrical data STK-25CTS/P1.....	4
4. Electrical data STK-32CTS/P1.....	5
5. Electrical data STK-25CTS/P2.....	6
6. Electrical data STK-25CTS/P3.....	7
7. Electrical data STK-25CTS/P4.....	8
8. Frequency band width	9
9. Response time & noise with typical circuit	9
10.Frequency delay performace.....	10
11.STK-CTS/P1 Dimensions & Pins & Footprint	11
12.STK-CTS/P2 Dimensions & Pins & Footprint	12
13.STK-CTS/P3 Dimensions & Pins & Footprint	13
14.STK-CTS/P4 Dimensions & Pins & Footprint	14

1. Description

The STK-CTS/P series current sensor is based on TMR (tunnel magnetoresistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Electric welder power supply
- Inverter
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 105
Storage temperature	T_stg	°C	-40 ~ 105
Mass	m	g	10
Remark 1: The product will not be damaged when used at 105 °C			

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _{CC}	V	6
ESD rating (HBM)	U _{ESD}	kV	4
Remark 2: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.			

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	4	
Impulse withstand voltage 1.2/50μs	U _w	kV	6	
Clearance distance (pri. -sec)	d _{Cl}	mm	> 8	Space shortest distance
Creepage distance (pri. -sec)	d _{Cp}	mm	> 8	Shortest distance along the body
Shell material			V0 according to UL 94	

2. Electrical data STK-20CTS/P1

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A		20		
Primary current measuring range	I_{pm}	A	-20		20	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 2		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{ A}$
Theoretical gain	G_{th}	mV/A		100		$2\text{ V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2.5		2.5	$-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Note:

 1. Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.

 2. Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit@25^{\circ}\text{C}} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit@25^{\circ}\text{C}}$ is 25°C .

3. Electrical data STK-25CTS/P1

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A		25		
Primary current measuring range	I_{pm}	A	-25		25	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 2		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{ A}$
Theoretical gain	G_{th}	mV/A		80		$2\text{ V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2.5		2.5	$-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Note:

3. Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.

4. Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit@25^{\circ}\text{C}} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit@25^{\circ}\text{C}}$ is 25°C .

4. Electrical data STK-32CTS/P1

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A	-12.8		12.8	
Primary current measuring range	I_{pm}	A	-32		12.8	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 0.8		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{ A}$
Theoretical gain	G_{th}	mV/A		62.5		$0.8\text{ V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C When $I < I_{pn}$ $\Delta I \text{ (max)} \leq 0.128\text{A}$
Accuracy	X_{TRange}	% of I_{pn}	-2		2	@ $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$ When $I < I_{pn}$ $\Delta I \text{ (max)} \leq 0.256\text{A}$
Accuracy @ RT	X	% of I_{pm}	-0.8		0.8	@ 25°C When $I_{pn} < I < I_{pm}$ $\Delta I \text{ (max)} \leq 0.256\text{A}$
Accuracy	X_{TRange}	% of I_{pm}	-1.5		1.5	@ $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$ When $I_{pn} < I < I_{pm}$ $\Delta I \text{ (max)} \leq 0.48\text{A}$

Note:

 5. Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.

 6. Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit@25^{\circ}\text{C}} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit@25^{\circ}\text{C}}$ is 25°C .

5. Electrical data STK-25CTS/P2

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A		25		
Primary current measuring range	I_{pm}	A	-25		25	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 1.25		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	1.63	1.65	1.67	$V_{out} @ 0\text{A}$
Theoretical gain	G_{th}	mV/A		50		$1.25\text{V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2.5		2.5	$-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Note:

7. Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.

8. Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit@25^{\circ}\text{C}} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit@25^{\circ}\text{C}}$ is 25°C .

6. Electrical data STK-25CTS/P3

Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A		25		
Primary current measuring range	I_{pm}	A	-25		25	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 2		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{ A}$
Theoretical gain	G_{th}	mV/A		80		$2\text{ V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2.5		2.5	$-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Note:

9. Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.

Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit@25^{\circ}\text{C}} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit@25^{\circ}\text{C}}$ is 25°C .

7. Electrical data STK-25CTS/P4

Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A		25		
Primary current measuring range	I_{pm}	A	-25		25	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 1.25		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	1.63	1.65	1.67	$V_{out} @ 0\text{ A}$
Theoretical gain	G_{th}	mV/A		50		$1.25\text{ V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3 dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2.5		2.5	$-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Note:

10. Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.

Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit@25^{\circ}\text{C}} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit@25^{\circ}\text{C}}$ is 25°C .

8. Frequency band width

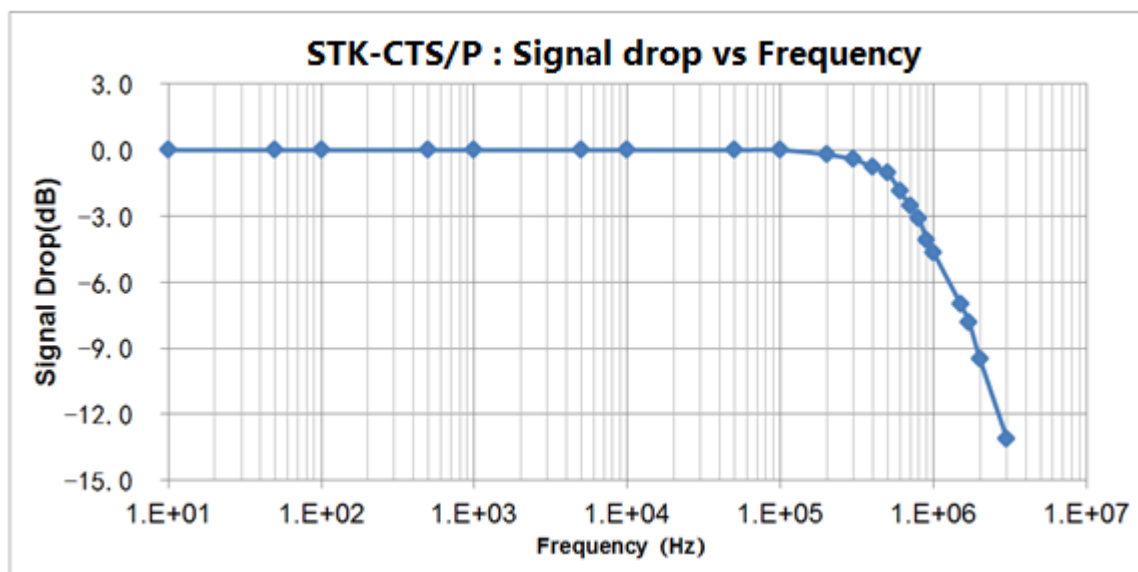


Fig.1 the band width of STK-CTS/P series current sensors. The bandwidth of the sensor is in the range of DC ~400 kHz (-3 dB).

9. Response time & noise with typical circuit

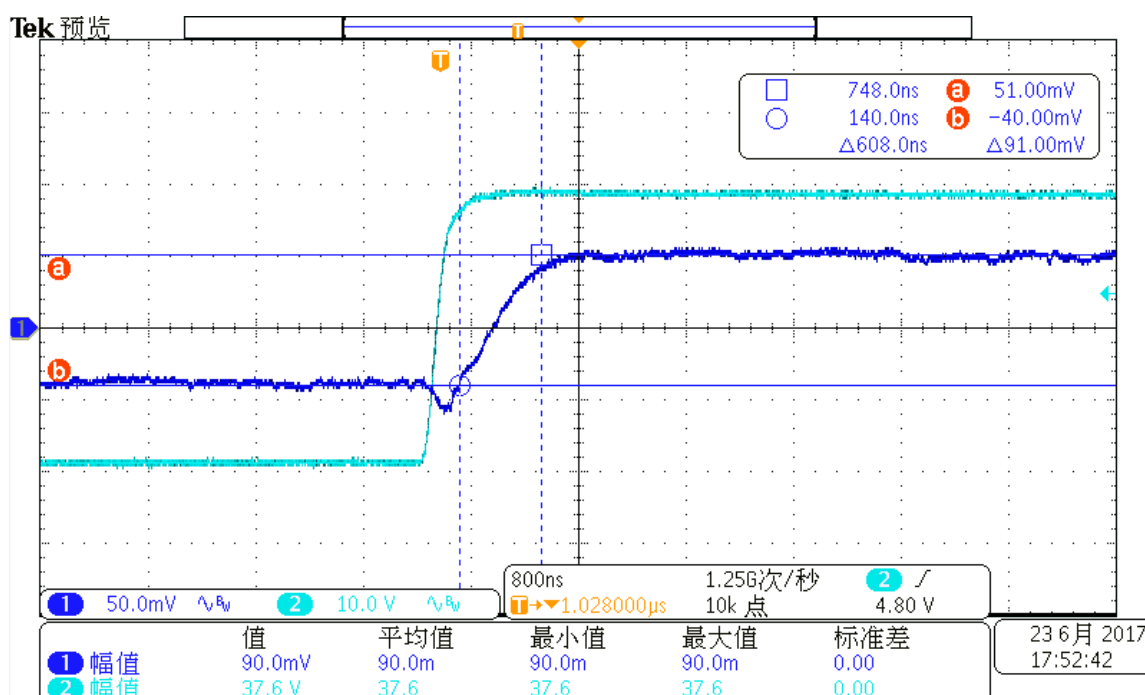


Fig.2 the step response time of STK-CTS/P current sensors. The light blue is primary current, while the dark blue is output signal of current sensor. The delay from 90% of the original current signal to 90% of the output of the sensor is less than 1 μ s.

10. Frequency delay performance



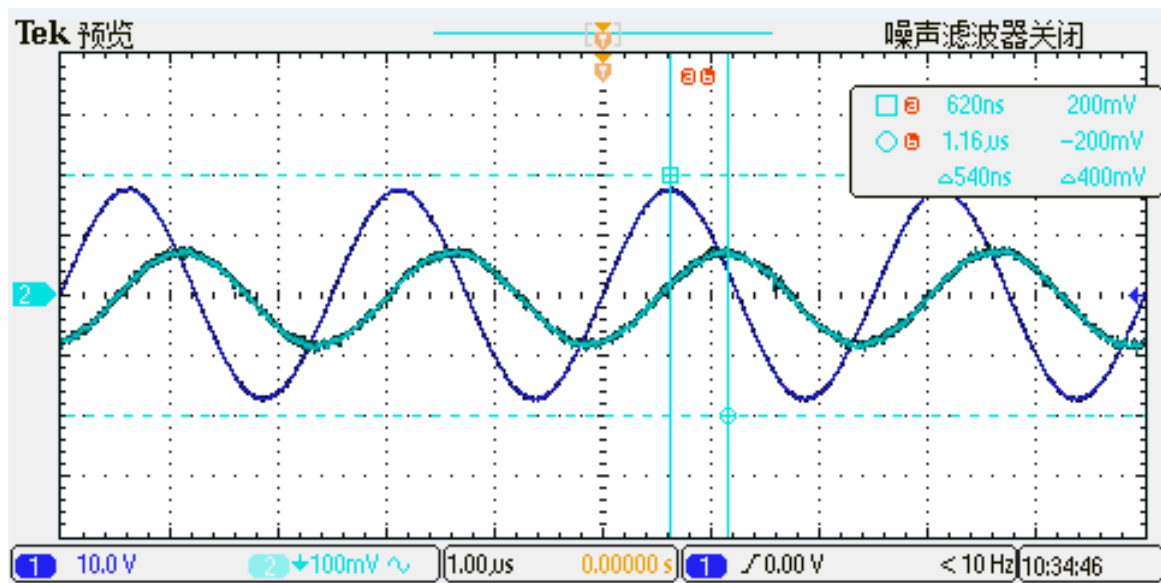


Fig.3 when detection the primary current with a frequency of 400 kHz. The typical results of the output of STK-CTS/P current sensor on the primary current delay characteristics. The delay time from primary current (light blue) to the output of the sensor (dark blue) is less than μs .





11. STK-CTS/P1 Dimensions & Pins & Footprint

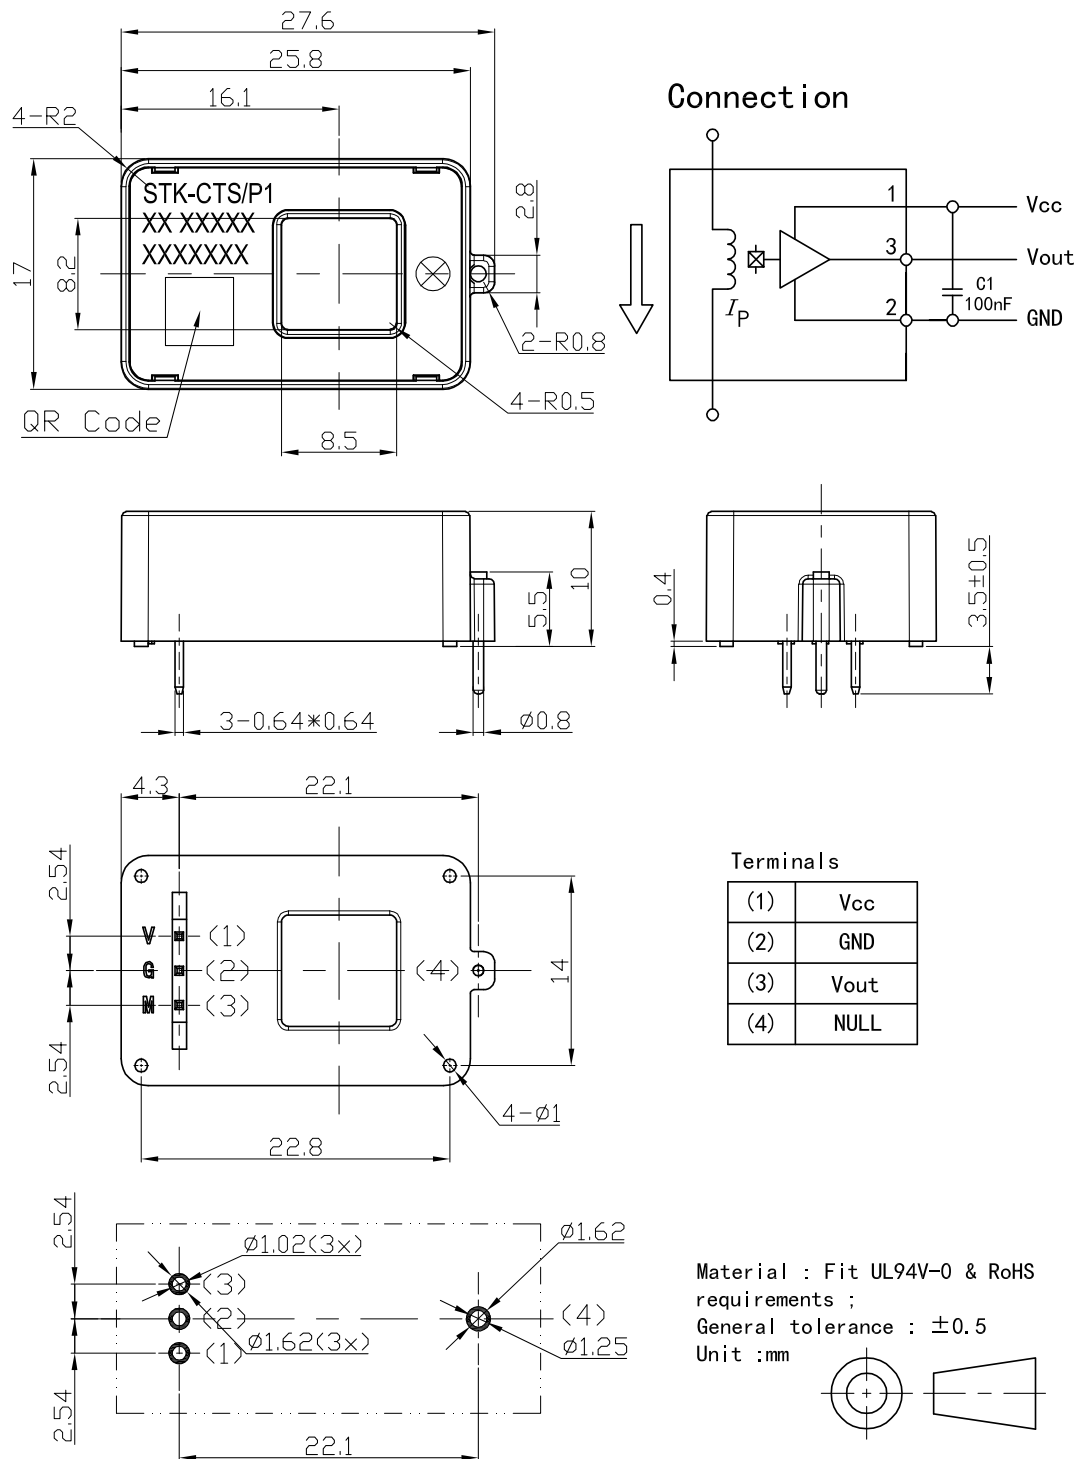

12. STK-CTS/P2 Dimensions & Pins & Footprint

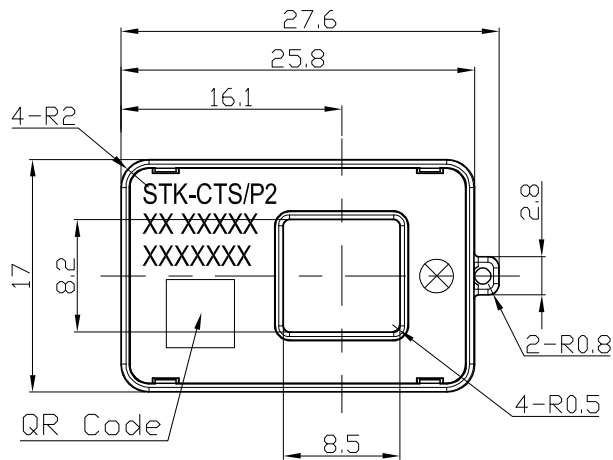


Connection

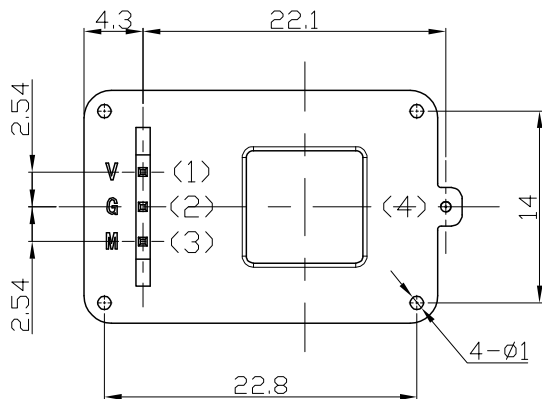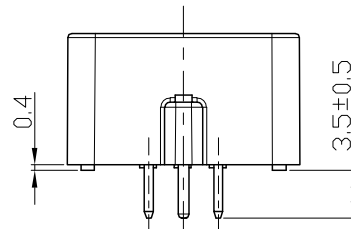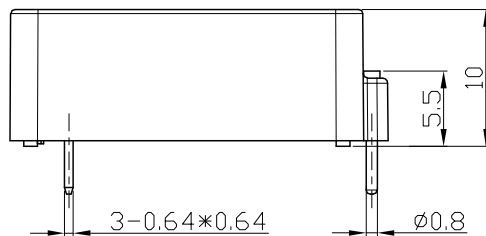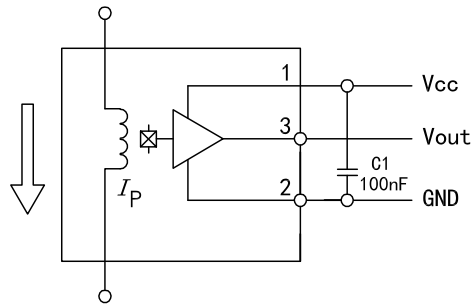


Terminals


(1)	V _{CC}
(2)	GND
(3)	V _{out}
(4)	NULL

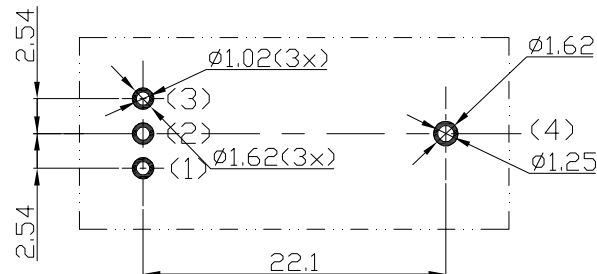





Material : Fit UL94V-0 & RoHS requirements ;
 General tolerance : ± 0.5
 Unit : mm



13. STK-CTS/P3 Dimensions & Pins & Footprint

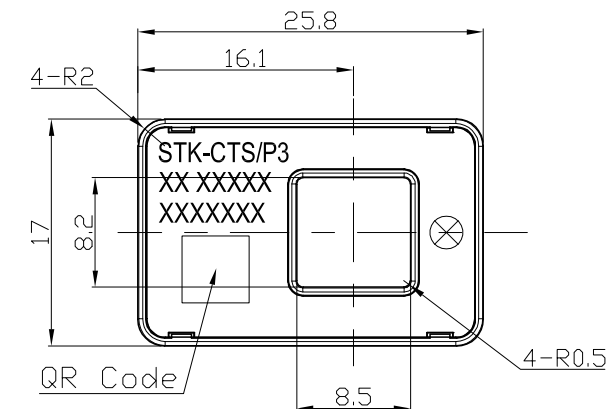


Connection

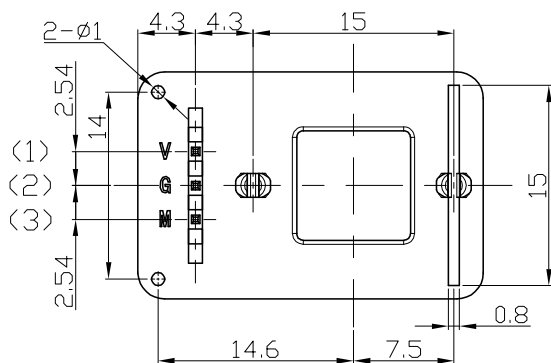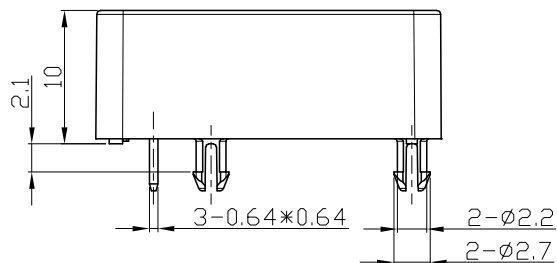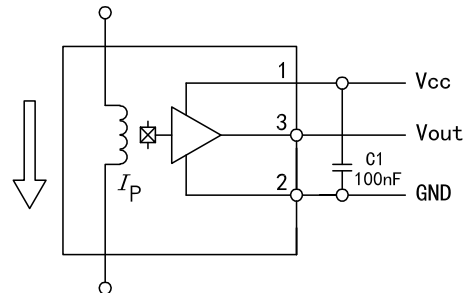


Terminals


(1)	Vcc
(2)	GND
(3)	Vout

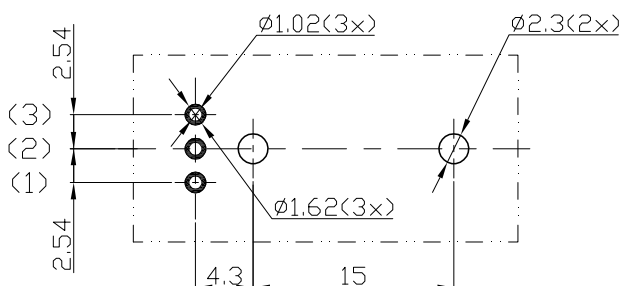





Material : Fit UL94V-0 & RoHS requirements ;
General tolerance : ± 0.5
Unit : mm



14. STK-CTS/P4 Dimensions & Pins & Footprint

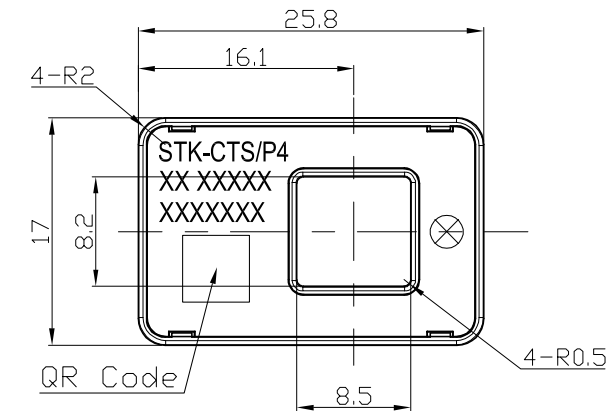


Connection

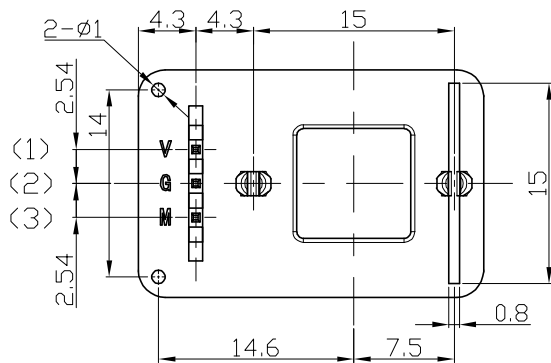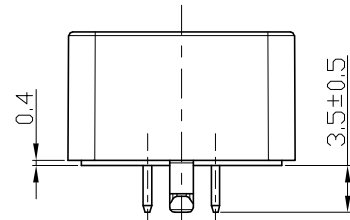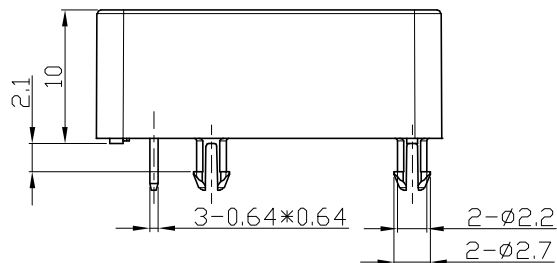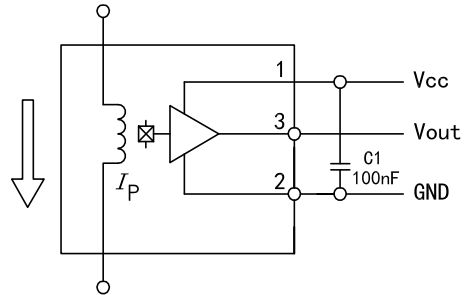


Terminals

(1)	V_{CC}
(2)	GND
(3)	V_{out}

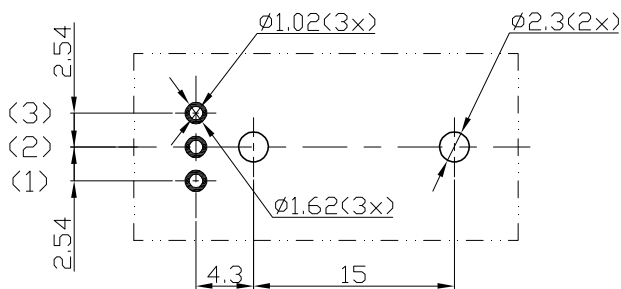

Material : Fit UL94V-0 & RoHS requirements ;
General tolerance : ± 0.5
Unit : mm



变更记录:

编写	审核	版本	日期	修改记录
朱海华		V5.0	2020-02-19	1、增加功耗上限 10mA 2、修改 P1/P2 的固定针方式 3、添加二维码打标 4、更新首页 3D 图
张庭坚		V5.1	2020-05-20	更新英文版本;
张庭坚		V5.2	2020-06-05	增加一款 STK-32CTS/P1
谢建勇	朱海华	V5.3	2022-03-31	增加一款 STK-20CTS/P1