


CURRENT SENSOR

PRODUCT SERIES: SFG-X.XCPL/A2-C

PRODUCT PART NUMBER: SFG-0.3CPL/A2-C

REVISION: Ver 1.0

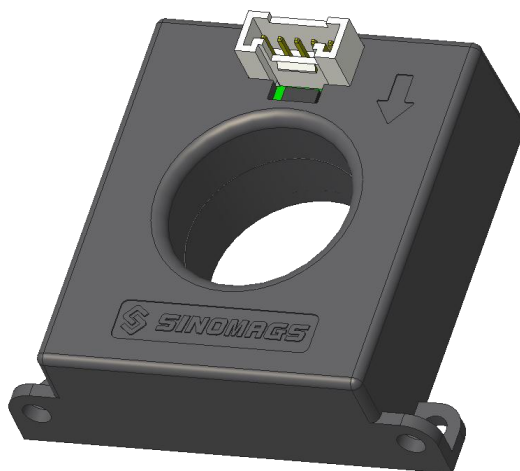

Sinomags Technology Co., Ltd.

Website: www.sinomags.com

CONTENT

1.	Description	2
2.	Absolute parameter	3
3.	Electrical data	4
4.	Application information	5
5.	Dimensions (in mm)	6

1. Description

Features

- High and low level output
- Single supply voltage +5V
- Self-check function
- Cobalt base magnetic ring
- PCB mounting.

Advantages

- Stable accuracy
- Low hysteresis offset
- Short response time
- Compact design

Applications

- Ground fault detection
- Converter leakage current detection
- Electric vehicle charge station
- IC-CPD
- Wallbox

Standards

- EN 50178 IEC60950-1
- UL1741 UL508 UL94-V0
- UL2231 CCID20

2. Absolute parameter

Absolute maximum ratings

Parameter	Symbol	Unit	Min	Typ	Max
Supply voltage	V _c	V			5.5
Ambient operating temperature	T _A	°C	-40		85
Ambient storage temperature	T _A	°C	-40		105

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

Isolation parameters

Parameter	Symbol	Unit	Value
RMS voltage for AC test 50Hz/1min	V _d	kV	3
Impulse withstand voltage 1.2/50μs	V _w	kV	7
Lightning surge current 8/20μs	I _{LS}	kA	5
Comparative Tracking Index (Group 2 @UL)	CTI	V	250-400
System working voltage (rms)	V _s	V	600
Application example	-	V	600,CAT III,PD2

3. Electrical data

at $T_A = 25^{\circ}\text{C}$, $V_C = 5\text{ V}$.

Parameters	Symbol	Unit	Min	Typ	Max	Remark
Supply voltage	V_C	V	4.9	5	5.3	
Current consumption	I_C	mA		25	30	
Output voltage (Check function)	V_{CK}	V		V_C		
Self-Check current	I_{CK}	mA		30		
Check enable voltage	V_{CE}	V	3.3		V_C	
Check disabled voltage	V_{CD}	V		< 0.2		
Power on initialization	t_{on}	ms			60	

4. Application information

Self-check Function

When the main circuit is not working, the system leakage current is 0, the V_{out} = Low level (0v).


(a) .when the CHK PIN is placed at high level (3.3~5V), V_{out} rises from Low level to high level(V_{cc});

(b) .when the CHK PIN is placed at low level (< 0.2V), the self-generated the V_{out} drops to Low level (0v).


When the above (a) and (b) are completed, the leakage current sensor is judged to have normal function.

When the self-check function is not used, add a 0Ω resistance to the CHK PIN and ground it.

Self-check Timing Diagram

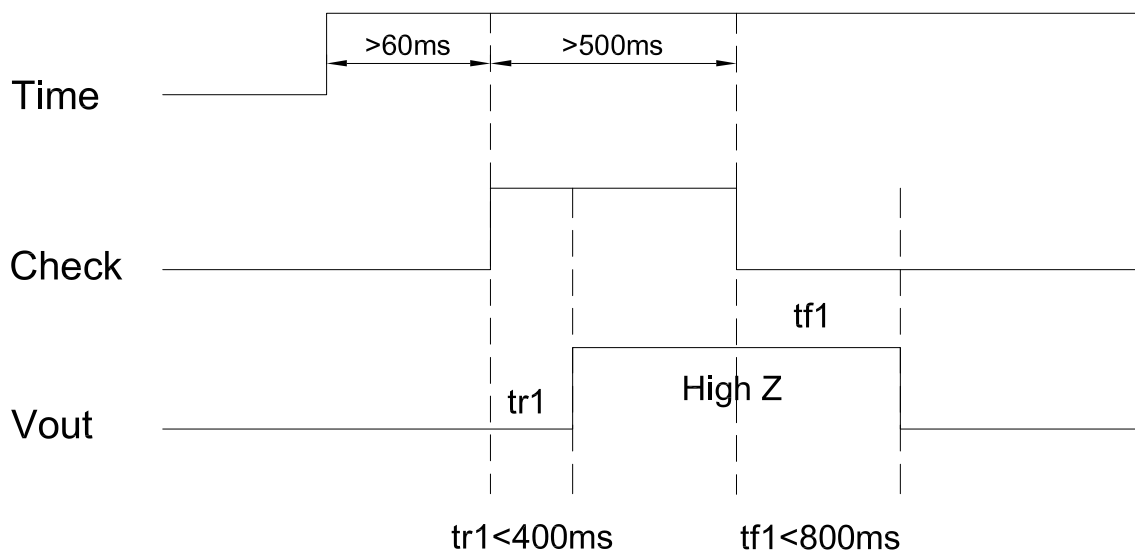

5. Dimensions (in mm)

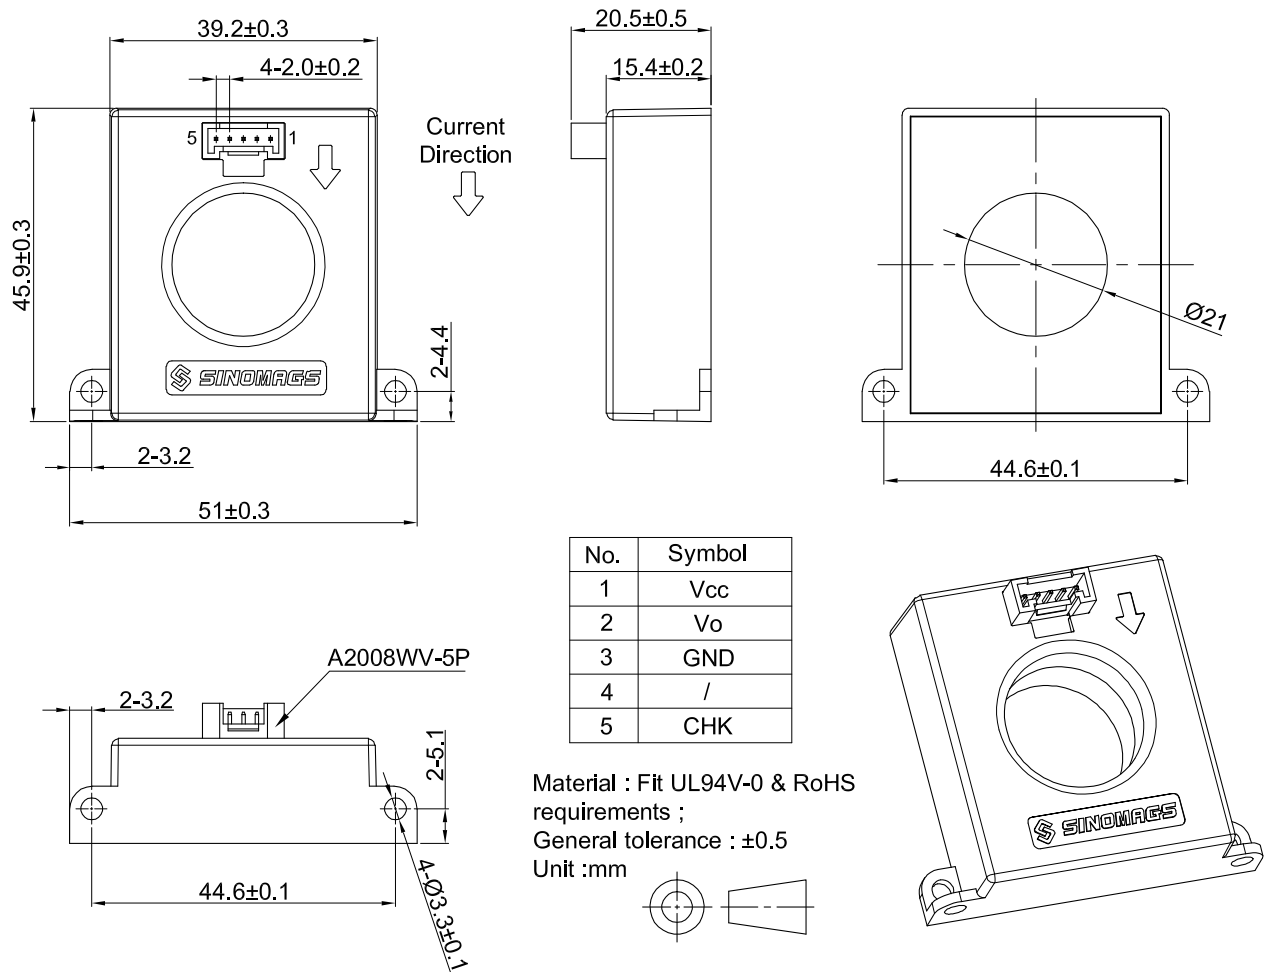

Pin Definition

No.	Symbol	Description
1	VCC	Power supply
2	Vo	High and low level output
3	GND	Power GND
4	/	NC-Float
5	CHK	Product Self-Check input