

CURRENT SENSOR

PRODUCT SERIES: SFG-X.XCPL/B-D

PRODUCT PART NUMBER: SFG-0.3CPL/B-D

REVISION: Ver 1.1



Sinomags Technology Co., Ltd.

Website: www.sinomags.com

CONTENT

1.	Description	2
2.	Absolute parameter	3
3.	Electrical data	4
4.	Application information	5
5.	Dimensions (in mm)	7

1. Description

Features

- High and low level output
- Single supply voltage
- Self-check function
- Cobalt base magnetic ring.

Advantages

- Stable accuracy
- Low hysteresis
- Short response time
- Compact design

Applications

- Ground fault detection
- Converter leakage current detection
- Electric vehicle charge station
- IC-CPD
- Wallbox

Standards

- EN 50178 IEC60950-1
- UL1741 UL08 UL94-V0
- IEC62955
- IEC 61851

2. Absolute parameter

Absolute maximum ratings

Parameter	Symbol	Unit	Min	Typ	Max
Supply voltage	V _c	V			5.5
Primary rated current	I _p	A		32	40
Ambient operating temperature	T _A	°C	-40		85
Ambient storage temperature	T _A	°C	-40		105

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

Isolation parameters

Parameter	Symbol	Unit	Value
RMS voltage for AC test 50Hz/1min	V _d	kV	3
Impulse withstand voltage 1.2/50μs	V _w	kV	7
Lightning surge current 8/20μs	I _{LS}	kA	5
Comparative tracking index	CTI	V	600
Application example	-	V	600,CAT III,PD2


3. Electrical data

at $T_A = 25^\circ\text{C}$, $V_C = 5\text{ V}$.


Parameters	Symbol	Unit	Min	Typ	Max
Supply voltage	V_C	V	4.8	5	5.2
Current consumption	I_C	mA		15	
Scaling factor of the DC component $I_{\Delta N1}$ (for monitoring purpose only!)	$S_{\text{PWM-OUT}}$	%mA		3.33	
Measuring range	$I_{\Delta N, \text{max}}$	mA	-300		300
Rated residual operating current 1	$I_{\Delta N1}$	mA DC		6	
Resolution(@ $I_{\Delta N}$, $T_A = 25^\circ\text{C}$)	X	mA		<0.2	V_C
TEST-IN Input Voltage, low level	$V_{\text{TEST-IN, low}}$	V	0		0.6
TEST-IN Input Voltage, high level	$V_{\text{TEST-IN, high}}$	V	2.5		5
Frequency range	f_{BW}	kHz		DC	
Primary nominal RMS current	I_M	A		32	40

4. Application information


Typical application diagram:

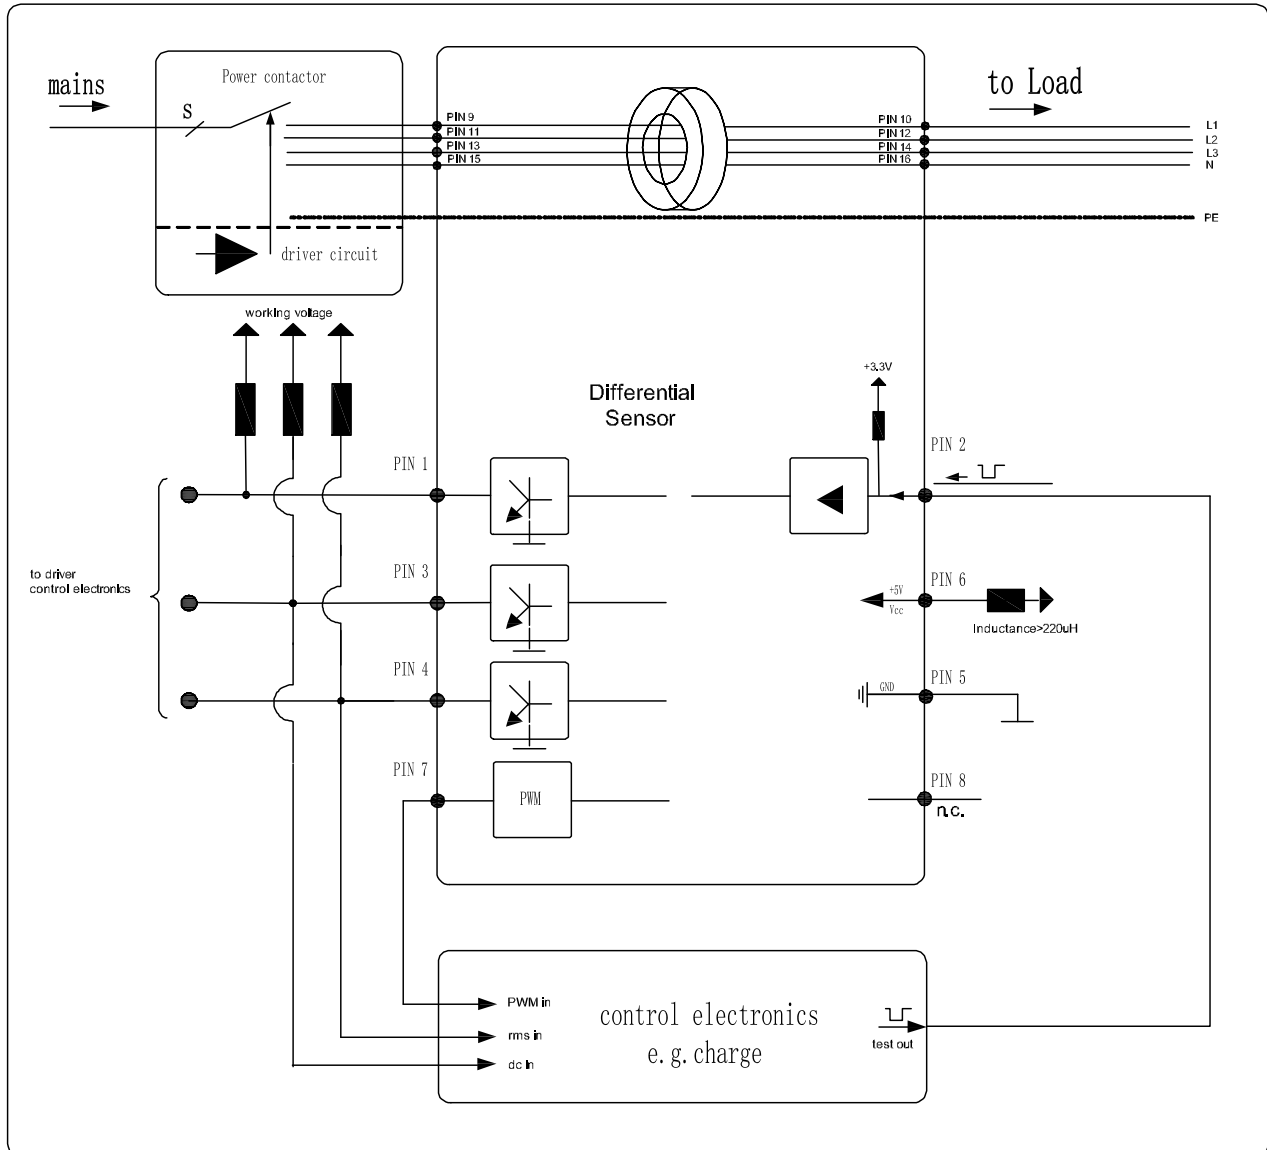

Standard type

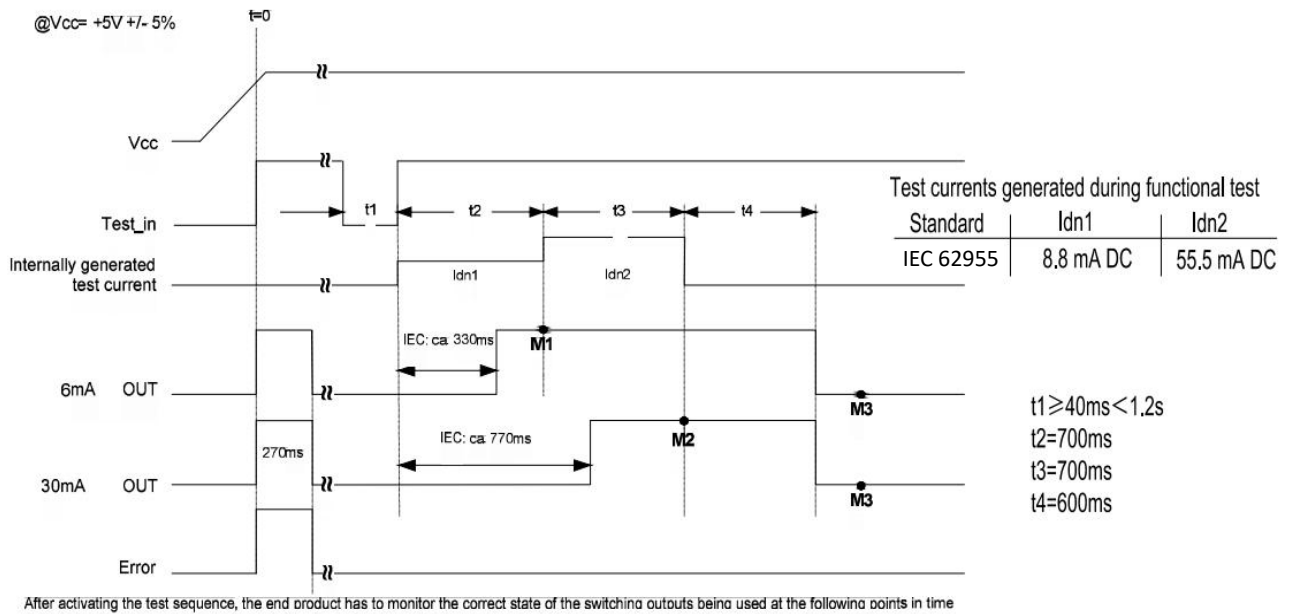

5. Dimensions (in mm)

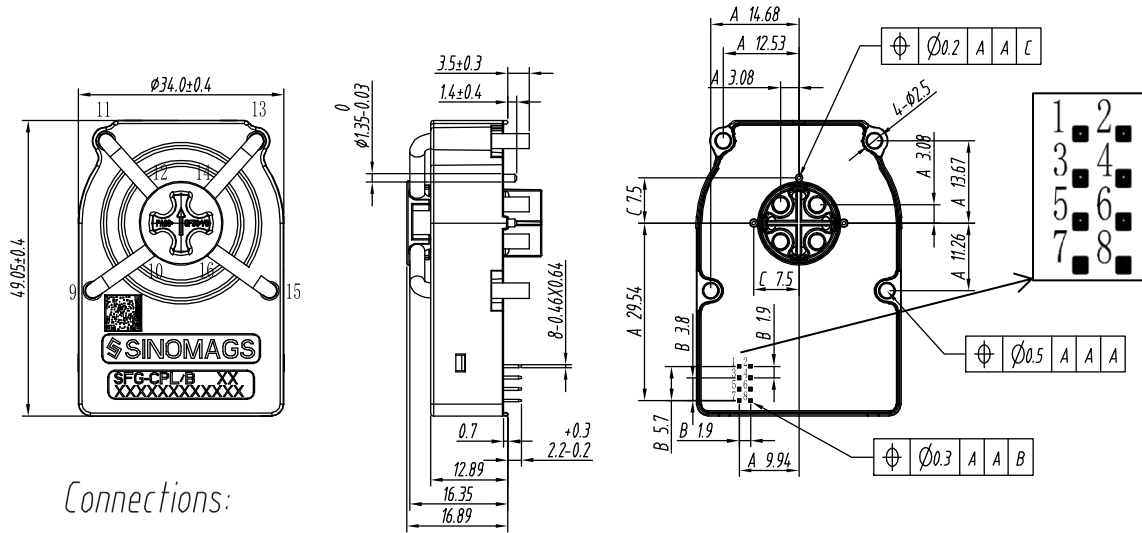

Connections:


PIN no. 1-8: 0.46mm x 0.46mm

PIN no. 9-16: $\phi = 2.5\text{mm}$

Material : Fit UL94V-0 & RoHS requirements ;

General tolerance : ± 0.5

Unit :mm



PIN NO.	Description
PIN1 → ERROR-OUT (open collector output)	Error flag: If a system fault is detected, PIN out will change from low level(GND) to high impedance state.
PIN2 → TEST-IN	A function test including an offset measurement is activated if this PIN is connected to GND for a period of 40ms to 1.2s. If the PIN is set to GND less than 40ms or more than 1.2s, no function test will be performed. During the functional test and offset measurement, no differential current shall flow.
PIN3 → X6-OUT (open collector output)	If the residual current is below DC 6mA and no system fault occurs the output on PIN 3 is a low level(GND). In any other case output PIN 3 is in a high impedance state.
PIN4 → X30-OUT (open collector output)	If PIN3 is high impedance, PIN 4 will also be set to high impedance
PIN5 → GND	Ground connection
PIN6 → VCC	Supply voltage
PIN7 → PWM-OUT	Acc. to the DC component of residual current a duty-cycle with $f=8\text{kHz}$ is generated. This is for monitoring purposes only and shall not be used to switch the power relay. Refer to $S_{\text{PWM-OUT}} = 3.33\%/mA$
PIN8 → N.C.	Not connected
PIN9 - 16	For primary wires connection