

Current Sensor

Product Series: SHK-VBS-T

Part number: SHK-VBS-T8-300-S3
SHK-VBS-T8-600-S3
SHK-VBS-T8-700-S3
SHK-VBS-T8-800-S3
SHK-VBS-T8-900-S3
SHK-VBS-T8-1000-S3
SHK-VBS-T8-1100-S3
SHK-VBS-T8-1200-S3

Version: Ver 1.3



Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Electrical data	3
3.	Dimension & Pin definitions.....	6

1. Description

The SHK-VBS-T8-S3 current sensor is based on Hall and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Electric welder power supply
- Inverter
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_a	°C	-40 ~ 125
Storage temperature	T_{stg}	°C	-40 ~ 125
Mass	m	g	85

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	Vcc	V	-0.5 ~ 8
			(Not operating) 6.5
Electrostatic discharge voltage	$U_{ESD\ HBM}$	kV	2

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
Insulation voltage	U_d	kV	2.5	RMS voltage for AC test 50Hz-1 min
Insulation resistance	R_{INS}	MΩ	500	DC 500V, ISO 16750
Clearance distance (pri. -sec)	d_{Cl}	mm	5.08	Shortest distance through air
Creepage distance (pri. -sec)	d_{Cp}	mm	5.08	Shortest path along device body
Comparative tracking index	CTI		PLC 3	
Case material			V0 according to UL 94	


2. Electrical data

Condition : $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$


Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary current measuring range	I_{PM}	A	-300		300	SHK-VBS-T8-300-S3
			-600		600	SHK-VBS-T8-600-S3
			-700		700	SHK-VBS-T8-700-S3
			-800		800	SHK-VBS-T8-800-S3
			-900		900	SHK-VBS-T8-900-S3
			-1000		1000	SHK-VBS-T8-1000-S3
			-1100		1100	SHK-VBS-T8-1100-S3
			-1200		1200	SHK-VBS-T8-1200-S3
Supply voltage	V_{CC}	V	4.75	5	5.25	All
Current consumption	I_{CC}	mA		26	40	@ $V_{CC} = 5.0\text{ V}$
Output voltage	V_{OUT}	V	$(V_{CC}/5) \times (V_{off} + G \times I_P)$			@ $T_a = 25^\circ\text{C}$
Quiescent voltage	V_{off}	V		2.5		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Sensitivity	G	mV/A		6.67		SHK-VBS-T8-300-S3
				3.33		SHK-VBS-T8-600-S3
				2.86		SHK-VBS-T8-700-S3
				2.50		SHK-VBS-T8-800-S3
				2.22		SHK-VBS-T8-900-S3
				2.00		SHK-VBS-T8-1000-S3
				1.82		SHK-VBS-T8-1100-S3
				1.67		SHK-VBS-T8-1200-S3
Load resistance	R_L	k Ω	10			
Ratiometricity error	ϵ_r	%		± 0.5		@ $4.75\text{ V} \leq V_{CC} \leq 5.25\text{ V}$
Sensitivity error	ϵ_G	%		± 1		@ $T_a = 25^\circ\text{C}$
Electrical offset voltage error	V_{OE}	mV		± 4.0		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Magnetic offset voltage error	V_{OM}	mV	-7.5		7.5	@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Ave. Temp. coefficient of V_{OE}	TCV_{OEAV}	mV/ $^\circ\text{C}$	-0.08		0.08	@ $-40^\circ\text{C} < T_a < 125^\circ\text{C}$

Ave. Temp. coefficient of S	TCS_{AV}	%/°C	-0.03	±0.01	0.03	@ -40°C < T_a < 125°C
Linearity error	ϵ_L	% I_P	-3		3	of Full range, $I_P > 900$ A or < -900 A @ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
			-1		1	of Full range, -900 A ≤ I_P ≤ 900 A @ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Response time	T_r	μs		4	6	@ 90% of I_{PM}
Frequency bandwidth (-3 dB)	BW	kHz	40			No RC circuit
Output voltage noise	V_{no}	mVpp		20		@ DC ~ 10 kHz

Total error(mV) for ≤900A

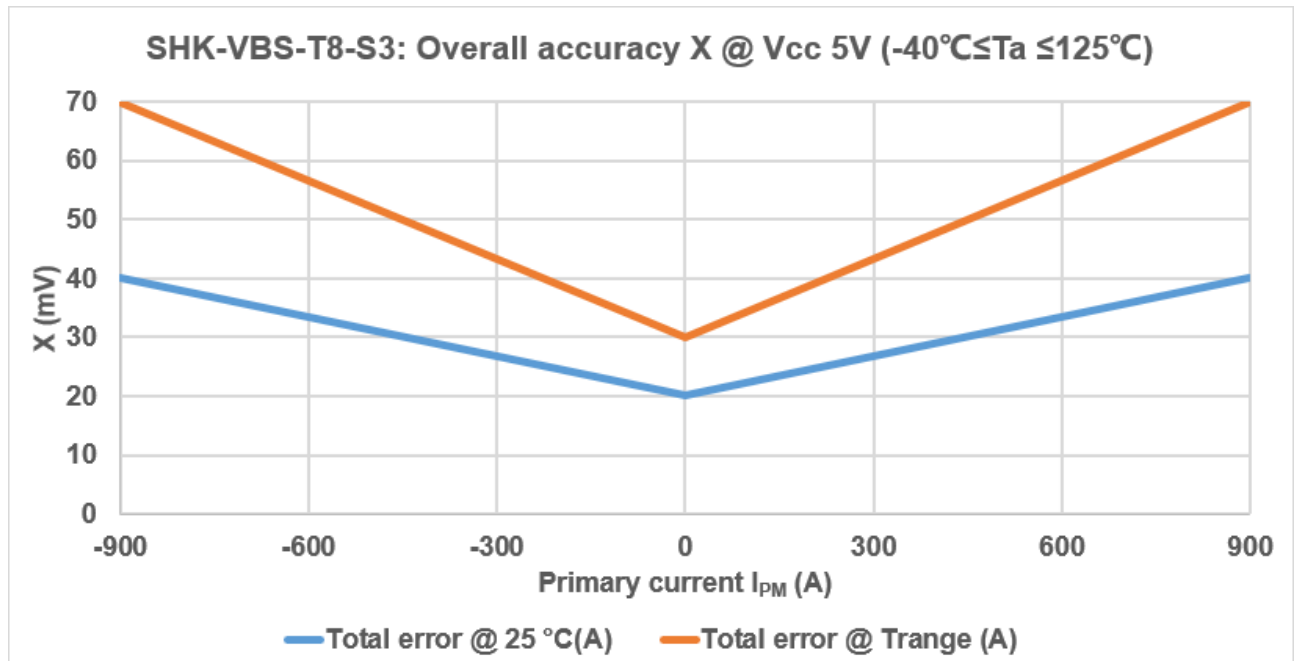


Overall accuracy X specification						
I_{PM} (A)	@ $T_a=25^\circ\text{C}$, $V_{CC}=5.0\text{V}$			@-40°C ≤ T_a ≤ 125°C, $V_{CC}=5.0\text{V}$		
-900	40mV	18A	2.00%	70mV	31.5A	3.50%
-100	22.22mV	10A	---	34.44mV	15.5A	---
0	20mV	9A	1.00%	30mV	13.5A	1.50%
100	22.22mV	10A	---	34.44mV	15.5A	---
900	40mV	18A	2.00%	70mV	31.5A	3.50%

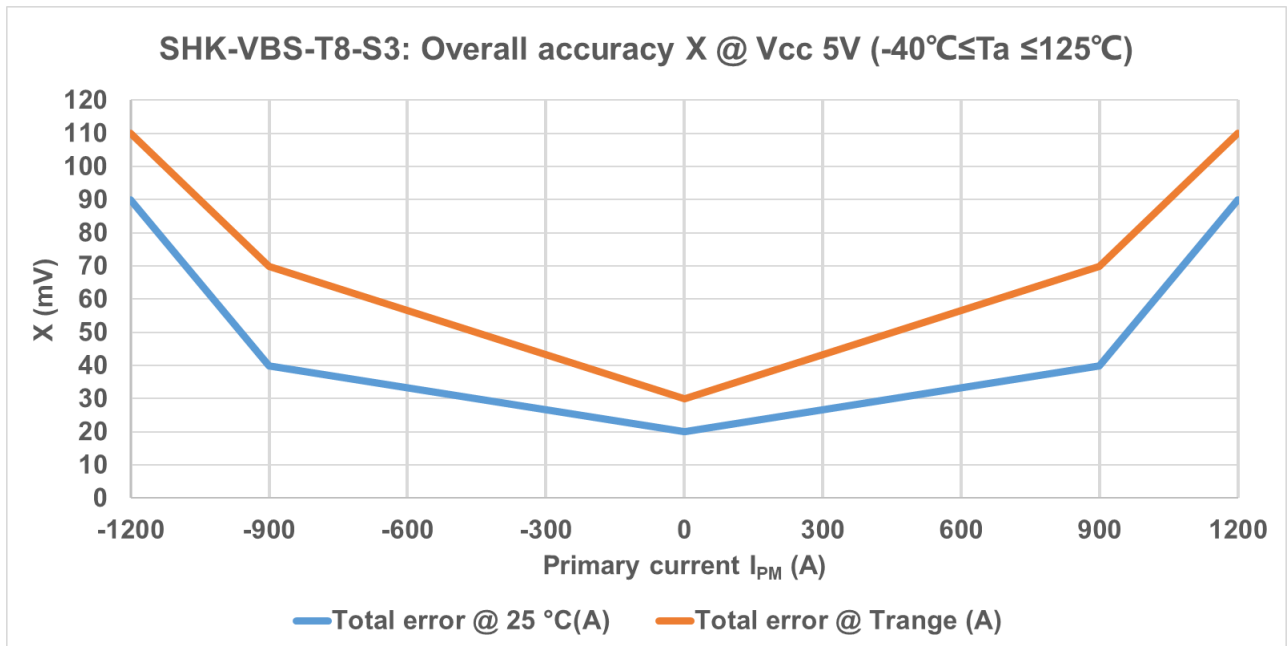Total error(mV) for $I_{PM} > 900A$ 

Overall accuracy X specification						
$I_{PM}(A)$	@Ta=25°C, VCC=5.0V			@-40°C ≤ Ta ≤ 125°C, VCC=5.0V		
-1200	90mV	54A	4.50%	110mV	66A	5.50%
-900	40mV	24A	2.00%	70mV	42A	3.50%
-100	22.22mV	13.33A	---	34.44mV	20.66A	---
0	20mV	12A	1.00%	30mV	18A	1.50%
100	22.22mV	13.33A	---	34.44mV	20.66A	---
900	40mV	30A	2.00%	70mV	42A	3.50%
1200	90mV	54A	4.50%	110mV	66A	5.50%

3. Dimension & Pin definitions

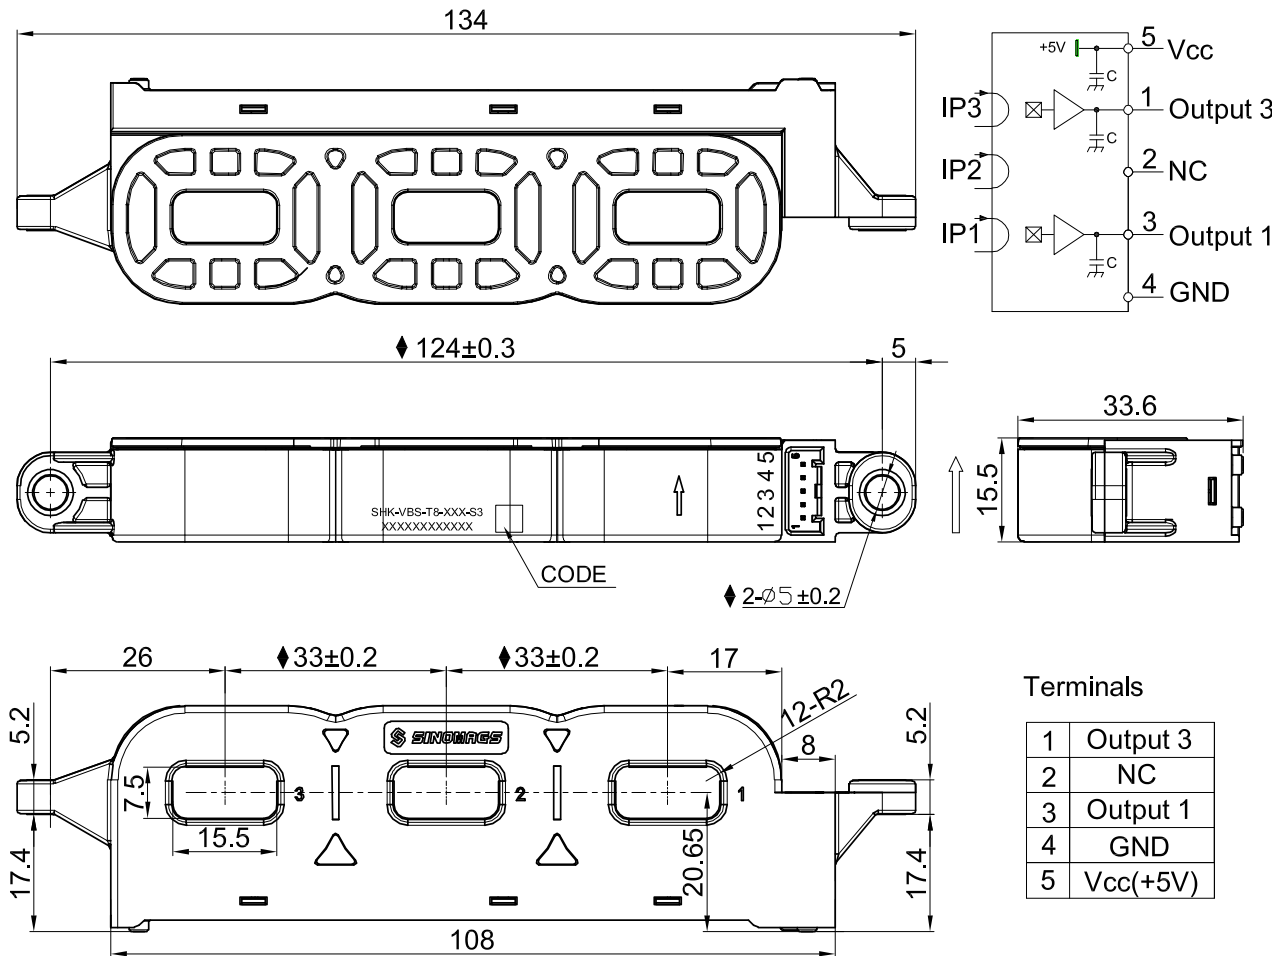

注: ◆ 为关键尺寸

